

ETERNITY LOW VOLTAGE FLOOR / TABLE LAMP

ASSEMBLY INSTRUCTIONS

Floor & table lamps are sold individually.

These instructions are provided for your safety.


Please read carefully before commencing work and retain for future reference.

SAFETY INFORMATION

- * The supply cable runs through the inside of this product. Take care not to place undue stress on the cable whilst unpacking to prevent the possibility of a poor connection.
- * If you are in any doubt consult a person competent to give advice on the assembly of electrical equipment.
- * If the external flexible cable of the lamp is damaged it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Do not exceed the wattage stated.
- * When changing the bulb, always unplug from the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.
- * This fitting is designed for use with self-shielded tungsten halogen lamps only. 

ASSEMBLY INSTRUCTIONS

1. Unpack the product and remove all packaging. Take care not scratch the surface of the poles whilst removing the plastic wrapping. Ensure the ends of the poles or the plug do not scratch base.
2. Lay the product out on the floor, having previously covered it with a soft cloth to avoid damage to the flooring and product finish. Assembly should take place with the product lying flat. Take care not to damage the concentric rings or crystals during assembly. Do not attempt to arrange concentric rings at this stage.
3. It may be necessary to remove protective packaging (plastic / cardboard) located at cable entry points of the product.
4. Screw the lower pole onto the bulb holder section. Hold the bulb holder section still and only rotate the pole to prevent the cable becoming twisted. ①
5. Gently pull excess cable out of the centre of the base until the lower pole meets the base.
6. Turn the base onto the lower pole, keeping the pole parallel to avoid cross threading. Keep the pole stationary and only rotate the base. ②
7. Pull any excess cable out through the cable grip in the side of the base. Tighten the grub screw on the cable grip to secure cable in position. Take care not to over tighten the grub screw as this may damage the cable.
8. Remove the protective covering from the felt pad and attach this to the underside of the base.
9. Stand the floor lamp upright then ensure all the assembled parts are fully tightened.
10. Arrange the concentric rings: ③ To minimise packaging waste, product is delivered with concentric rings in the same plane (flat). Unscrew the domed nuts located at the pivot points then use a spanner to loosen the nuts. Take care not to damage crystals. Adjust each ring in turn starting with central ring then securely tighten the fixing nuts. Ensure the central ring does not contact the bulbs or bulb holders as this may damage them. Replace the domed nuts.
11. Fit the bulb: ④ Type and wattage as indicated on the fitting.  **Always use self-shielded bulbs.** Do not touch halogen bulbs with bare hands, as this will shorten their life. **The wattage indicated must not be exceeded.**
12. Your lamp is now ready for use.

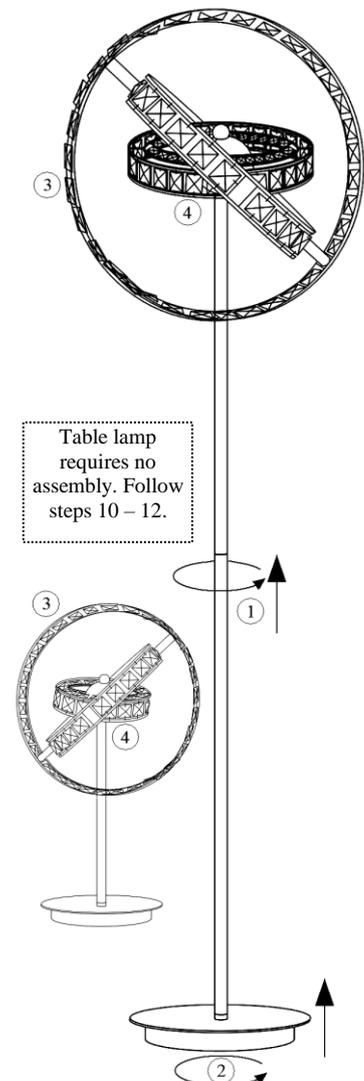

GENERAL INFORMATION

This product is designed for internal use only. **Do not use polish or abrasive cleaner – just a soft dry cloth.**